


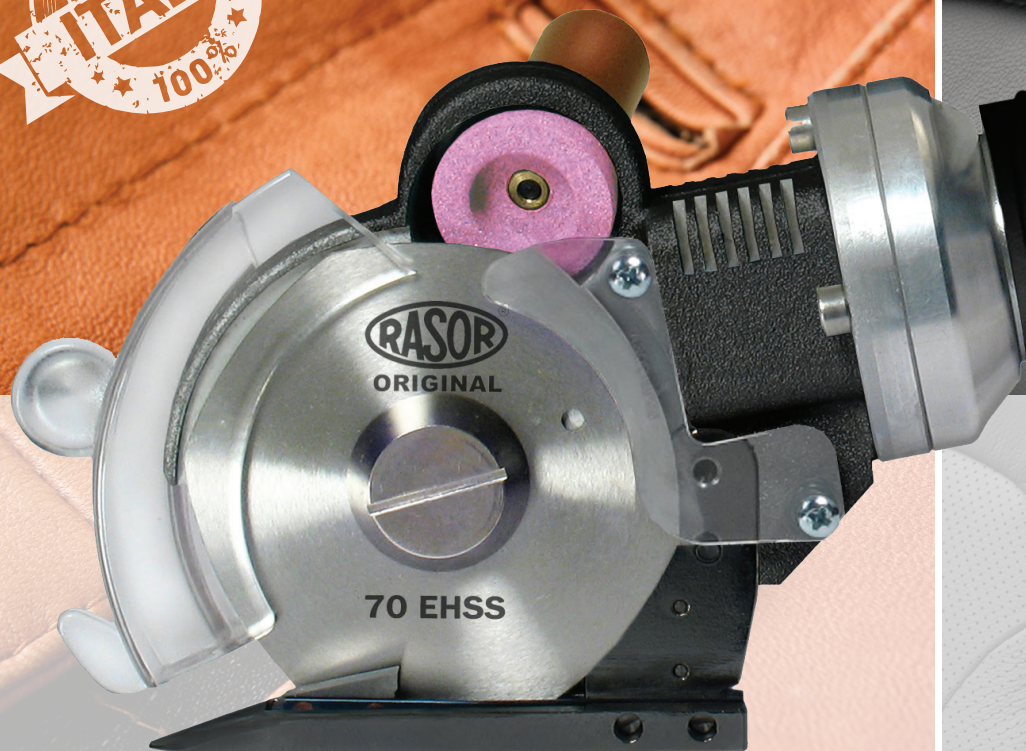

NEW
5 WINGS ROTOR
FOR MORE POWER
NEW GEARS
1300 RPM

FP702

NEW PNEUMATIC HAND SHEAR

New FP702. The new cutting solution. Suitable for leather.



1946



WHAT'S NEW:

New 5 wings turbine
New gears 1300 rpm
New housing coating for heat reducing
High manageability in 920 g

FOLLOW US:



FRANCE GENERAL MACHINES A COUDRE
13 Chemin du Génie 69200 Vénissieux
Tél : +33(0) 4 78 68 66 62 + 33(0)6 45 58 79 03
E mail : contact@fgmc.pro
<https://francegeneralmachinesacoudre.fr>



NEW PNEUMATIC HAND SHEAR CE FP702

TECHNICAL DETAILS:

Muffled turbine motor with central back-located air exhaust
6 bar nominal* (± 1 bar) lubricated air supply
Air consumption: 9 std liters/sec*
Power: 380 W at nominal air supply conditions
Blade: 70 mm with hard metal counterblade
Blade descr.: 70EHSS, 70 mm dia., 6-edge, HSS steel
Blade speed: 1300 r.p.m.*
Cutting ability: up to 20 mm
Sound pressure: 72 dB_e (EN ISO 15744)*
Vibration Level: 1,36 m/sec² (ISO 8662)*
Net weight: 920 g
Total weight (with packing): 1750 g
Temperature range: 0 – 55 °C
Umidity range: 10 – 95% without condensate


**The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.*



Minimum recommended



Rasor recommend to use only dry air lubricated with special Rasor VG 10 pneumatic oil



BLADES AVAILABLE:

70SHSS, 70 mm 4-edges, HSS steel | **70EHSS**, 70 mm 6-edges, HSS steel | **70CHSS**, 70 mm circular, HSS steel | **70DHSS**, 70 mm 10-edges, HSS steel | **70SHSSTF**, 70 mm 4-edges, HSS steel Teflon[®] coated | **70EHSSTF**, 70 mm 6-edges, HSS steel Teflon[®] coated | **70EMD**, 70 mm 6-edges, Carbide (Widia[®]) | **70DHSSTN**, 70 mm 10-edges, HSS steel Titanium coated | **70DHSSTF**, 70 mm 10-edges, HSS steel Teflon[®] coated