




FRANCE GÉNÉRAL MACHINES À COUDRE  
Réparation • Vente • Achat • Location

**JACK**  
China No.1

Shanghai stock  
listed



[WWW.FGMC.PRO](http://WWW.FGMC.PRO)

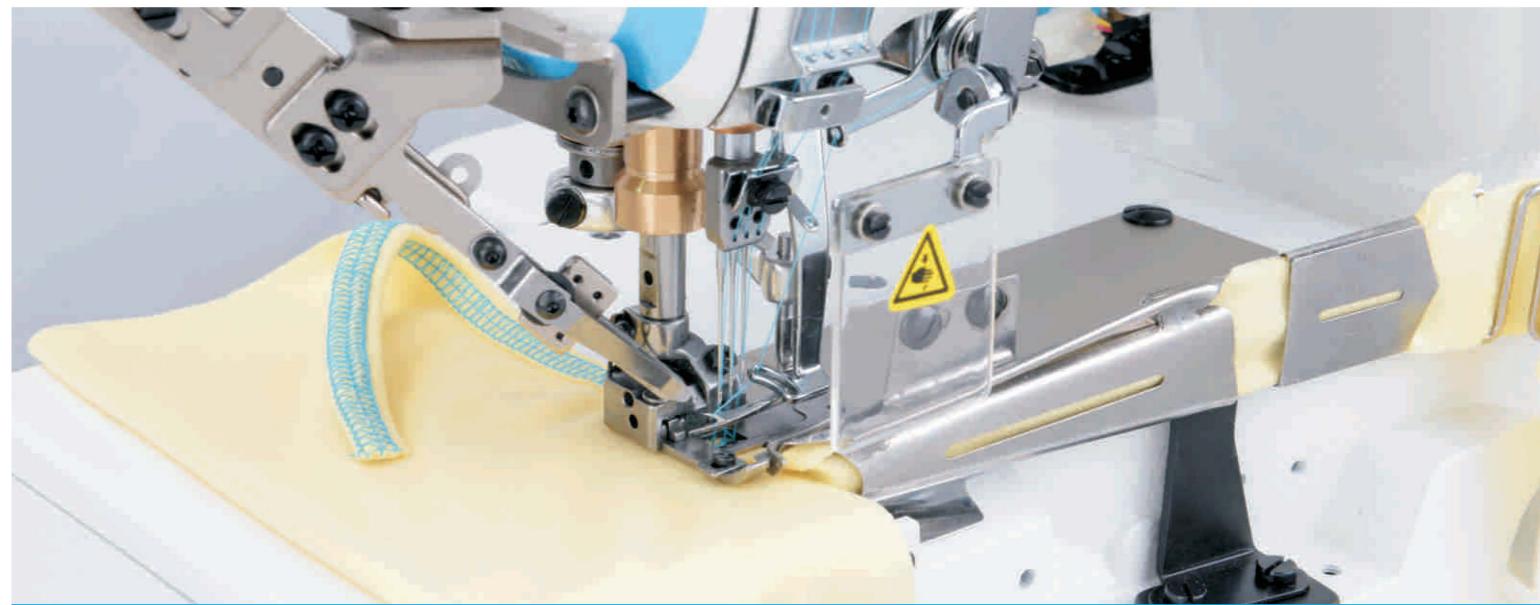


High speed computerized  
flat-bed interlock



W4


# W4

High Speed Computerized Flat-bed Interlock Machine  
Full-automatic; Multifunctional; Stable

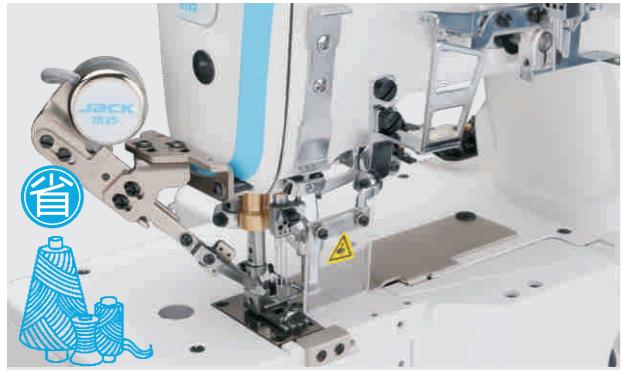

## 1 Automatic thread trimmer, Enhance operation efficiency

The upper and lower thread trimmer, service life of the Scissors is longer, with less trouble and high efficiency , 100% trimming precisely

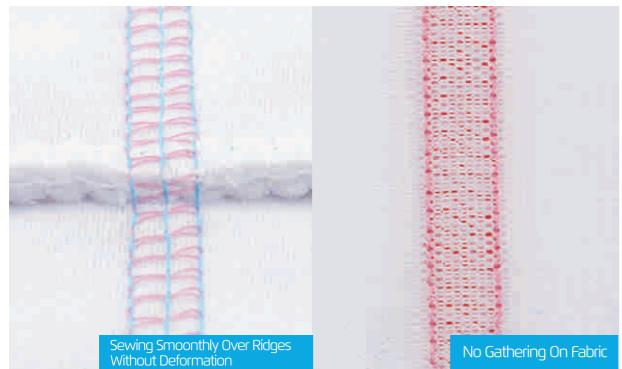



## 2 For light and heavy fabric , beautiful stitch

Enlarge the sewing range , suitable for various fabrics ,smooth sewing without arch




## 4 One machine has multi-functions, fast switching

Only adding additional accessories, One machine is capable for Plain seam, Tape binding, Cover seam sewing and Bottom hemming , suitable for various process Sewing

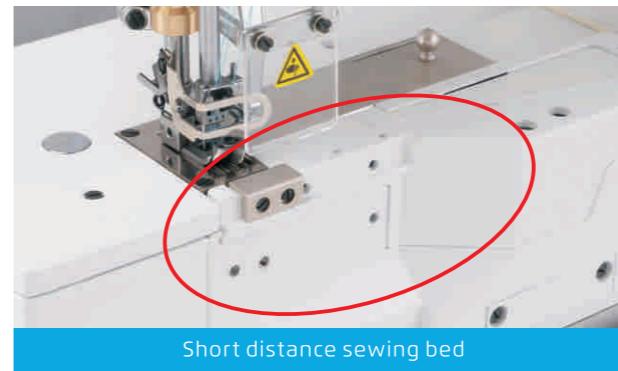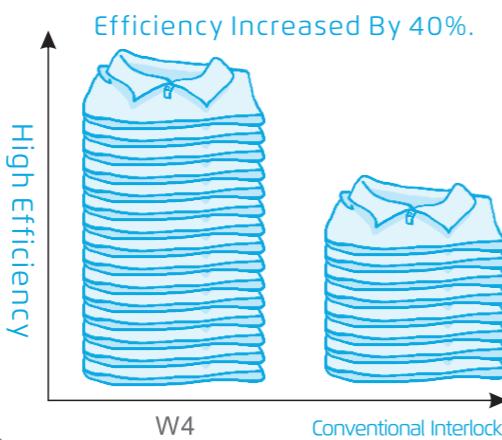

Short distance sewing bed

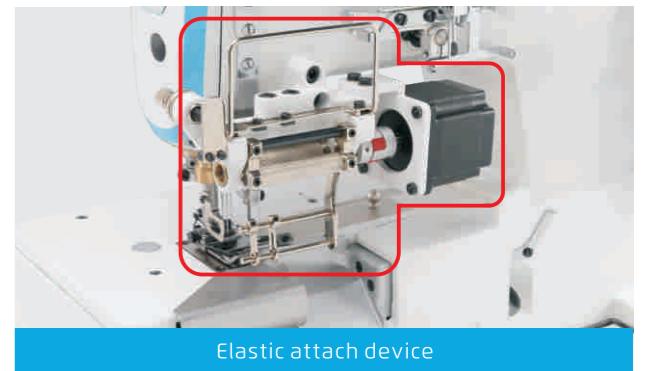


Elastic attach device



Out moved thread cam, fast positioning




Control oil efficiently ,high good-product (yield ) rate

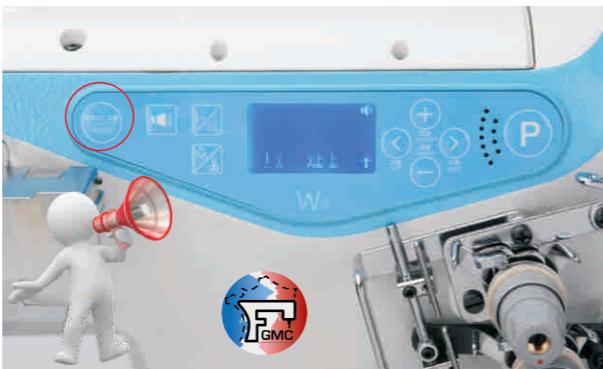

## 3 Voice guide , easy to learn and easy to use

Each Button has Voice Reminder, Each Operation has Scientific Voice Guide .The simple fault can be solved by voice navigation function

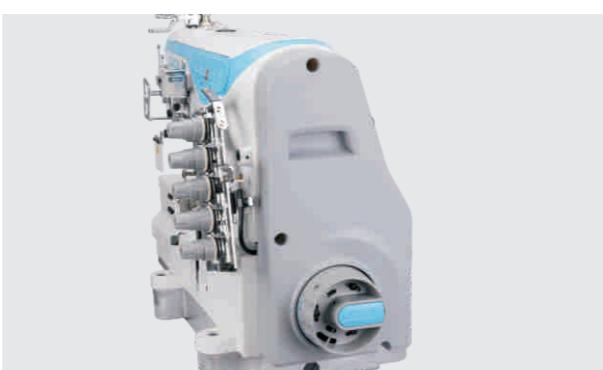

## 5 Integrated design, plug and operate right way

Mechanical and electrical integration, using only with one plug in a controller

## Specification

| Model      | Functions                                  | Needle          | Needle No. | Thread No. | Stitch Length (mm) | Stitch Width (mm) | Differential Ratio | Presser Foot Lifting Height (mm) | Max. Speed (s.p.m) | Volume (mm) | Weight (kg) |
|------------|--|-----------------|------------|------------|--------------------|-------------------|--------------------|----------------------------------|--------------------|-------------|-------------|
| W4-UT-01GB | Plain Seaming                              | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 54/64       |
| W4-UT-02BB | Tape Binding                               | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 54/64       |
| W4-UT-03DB | Covering Stitch                            | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 54/64       |
| W4-UT-08AC | Bottom Hemming                             | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 54/64       |
| W4-D-01GB  | Plain Seaming                              | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 48/58       |
| W4-D-02BB  | Tape Binding                               | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 48/58       |
| W4-D-03DB  | Covering Stitch                            | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 48/58       |
| W4-D-05CB  | Elastic Lace Attaching (Right-Side Cutter) | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 5                                | 4000               | 670x445x595 | 48/58       |
| W4-D-07CB  | Elastic Lace Attaching                     | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 5                                | 5500               | 670x445x595 | 48/58       |
| W4-D-08AC  | Bottom Hemming                             | UY128GAS 11-14# | 3          | 5          | 1.5-4.5            | 5.6/6.4           | 0.65-1.3           | 7                                | 5500               | 670x445x595 | 48/58       |
| W4-D-23GB  | Plain Seaming (large Stitch Length)        | UY128GAS 11-14# | 3          | 5          | 6                  | 5.6/6.4           | 1                  | 7                                | 4000               | 670x445x595 | 48/58       |
| W4-D-23BB  | Tape Binding (Large Stitch Length)         | UY128GAS 11-14# | 3          | 5          | 6                  | 5.6/6.4           | 1                  | 7                                | 4000               | 670x445x595 | 48/58       |
| W4-D-23GBL | Plain Seaming (Extra Large Stitch Length)  | UY128GAS 11-14# | 2          | 4          | 7.75               | 5.6/6.4           | 1                  | 7                                | 4000               | 670x445x595 | 48/58       |
| W4-D-23BBL | Tape Binding (Extra Large Stitch Length)   | UY128GAS 11-14# | 2          | 4          | 7.75               | 5.6/6.4           | 1                  | 7                                | 4000               | 670x445x595 | 48/58       |

Note: UT: computerized, D: direct drive.